




Modularity Tiles

PRODUCT SPECIFICATIONS

Description: Modularity tiles are dry-back vinyl tiles featuring interchangeable cut-out shapes and vibrant, contemporary colors.

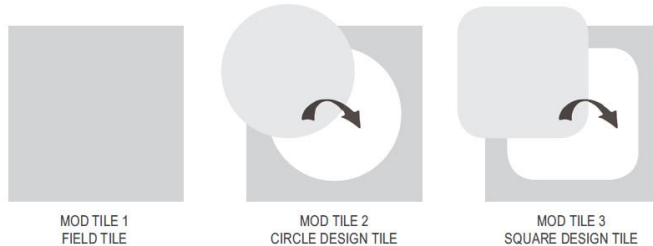

Applications: Suitable for residential, commercial, and trade show display use. Can be installed with temporary, semi-permanent, and permanent adhesive.

Tile Size: 12in x 12in

Tile Thickness: ASTM F386-02 0.106in (2.7mm)

Wear Layer: 0.008in (0.25mm)

Tile Insert Size: 9" diameter circle or 9" square

Tile Weight: 16.2oz

Composition: Wear layer, Graphic layer, Balance layer, Leveling layer

Materials: PVC (virgin and recycled, Calcium Carbonate, DINP plasticizer)

Third Party Testing Results:

Physical Characteristics

Overall Size		12" x 12" (304.8mm x 304.8mm)
Wear Layer Thickness		0.008 in. (0.2mm)
Overall Thickness	ASTM F386-02	0.106 in. (2.7mm)
Dimensional Stability	ASTM F2199-09	.12% Loss
Size and Squareness	ASTM F2055	Passes
Flexibility	ASTM F137-03	Passes
Resistance to Chemicals	ASTM F925-02	Excellent
Residual Indentation	ASTM F1914-98	.003 inch

Fire Safety Data

Critical Radiant Flux	ASTM E648	> 0.45 watts / cm ² , NFPA Class I
Smoke Density	ASTM E662	< 450 - Passes

Colors: Violet, Lavender, Avocado, Emerald, Tangerine, Ruby, Lapis, Periwinkle, Surf, Petal, Sky, Daffodil, Black, White, Slate, Walnut, Sand

Edging: Vinyl or metal transition edging available.

Recycled Content: Up to 35% recycled content

Recyclability: 100% Recyclable

Warranty: 3-year warranty against manufacturer's defects.



50 East 42nd Street, 14th Floor
New York, NY 10017

www.ModularityTiles.com | Toll Free: 866 471 1022 | Fax: 212 953 1116